

Fred V. Fowler Company, Inc.




Cross Spirit Levels

Special Features—No. 52-422-078

- The Cross Spirit Level is used for leveling machines & other apparatus.
- Overall length: 3.15" (80mm); width: 2.64" (67mm); thickness: .667" (17.2mm).
- Center to center distance of holes is 1.378" (35mm).
- Sensitivity is .001"/10", 20 seconds (.1mm/m).
- Level is screw-on type.

Special Features—No. 52-422-079

- The Cross Spirit Level is used for leveling machines & other apparatus.
- Overall length: 6" (150mm); width: 6" (150mm); thickness: 1.18" (30mm).
- Center to center distance of holes is 2.36" (60mm).
- Sensitivity is .0002"/10", 4 seconds (.02mm/m).
- Level is screw-on type.

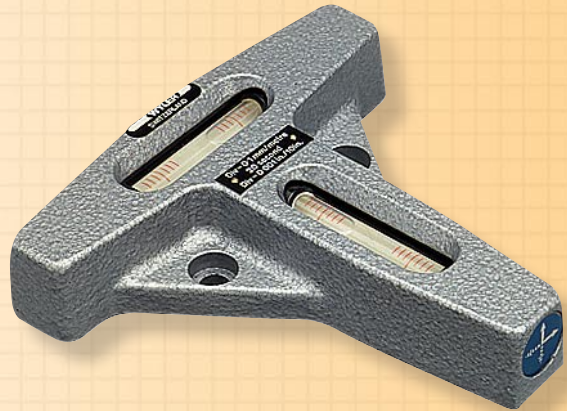

▲ Cross Spirit Level No. 52-422-079
Other sizes and sensitivities available upon request.

Order No.	Description
52-422-078	Cross Spirit Level—3" (80mm)
52-422-079	Cross Spirit Level—6" (150mm)

FOWLER ONLINE

The Fred V. Fowler Co., Inc has always taken every opportunity to improve its customer service. For that reason we offer a feature-packed homepage on the Internet. There, you will find our main catalogs and special publications available for viewing and research. We also provide technical info, application success stories as well as new products breaking news and a variety of ways to contact us.

<http://www.fvfowler.com>



Wyer