


Fred V. Fowler Company, Inc.



Ultra-Cal IV IP65 Electronic Caliper

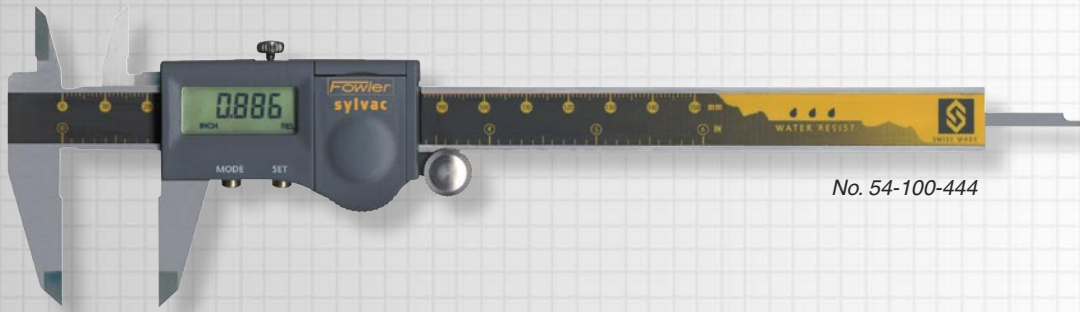

No. 54-100-444



Introducing Fowler/Sylvac's Electronic Water/Oil Resistant Caliper with Sylvac's patented inductive measuring system.

Special Features:

- 4 way jaws.
- Resolution: .0005"/.01mm.
- Repeatability: .0005"/.01mm.
- Made of hardened stainless steel.
- Large easy to read LCD display
- Direct inch/metric conversion.
- Direct RS232 output.
- Maximum measuring speed of 60"/sec.
- Battery life: 3000 hours continuous.
- Auto-off option.
- Electronics protected to IP65
- Includes a fitted case.

Jaw Specifications

Caliper Size	6"	8"	12"
External Jaw Length	1.5"	1.5"	2.5"
Internal Jaw Length	.625"	.625"	.750"
Jaw Thickness	.118"	.118"	.118"

IP65 Specifications	
Dust (6)	Water (5)
Dust-tight	Protected against water projected in jets from any direction

Order No.	Description	Accuracy
54-100-444	0—6" Ultra-Cal IV	.001"/.02mm
54-100-448	0—8" Ultra-Cal IV	.0015"/.03mm
54-100-412	0—12" Ultra-Cal IV	.0015"/.03mm
54-115-333	Simplex Connection Kit Includes 80" (2m) connecting cable with 9 pin IBM AT RS-232 connector; software support disk & instruction manual.	
54-100-350	Replacement lithium battery (type #CR2032 or BR2032)	