


# Fred V. Fowler Company, Inc.

**Fowler**

## Universal Bench Gage


**5-YEAR WARRANTY**  
**INTERFACE RS-232 DIRECT**

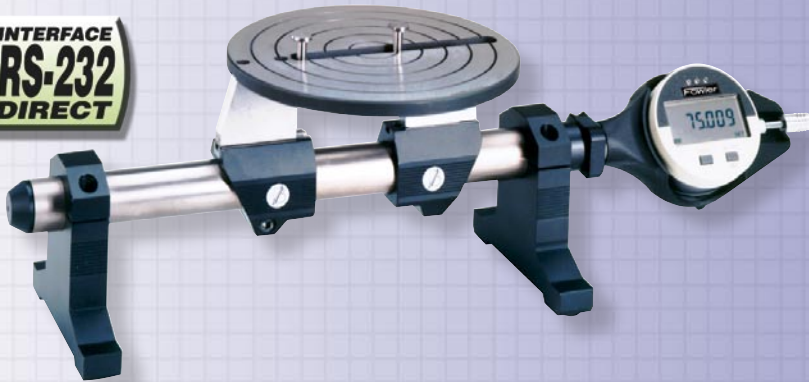

For fast accurate measurement of internal and external dimensions... internal measuring range with table is 0.4—4" (10—100mm) and external range is 0—3.5" (0—90mm).

Larger sizes to 40"(1000mm) plus can be measured using two tables.

- Large range of accessories available for internal/external measurement of diameters, grooves, threads, splines/gears, shallow spigots and recesses, tapers.
- Also used to check lengths, hole centers, concentricity and rolling gear tests.
- Digital readout option with .0005/.00005"(.01/.001mm) resolution, min/max hold, inch/metric conversion, preset memory and RS232 output for SPC.

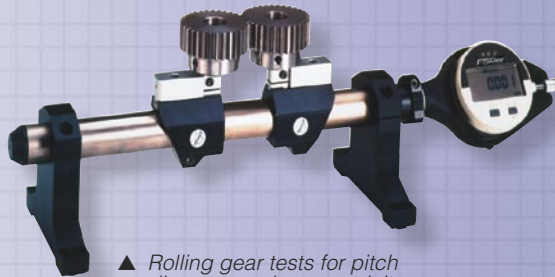


▲ Rolling gear tests for pitch diameter and concentricity.



**Bowers**



▲ Larger sizes to 40"(1000mm) plus can be measured using two tables.

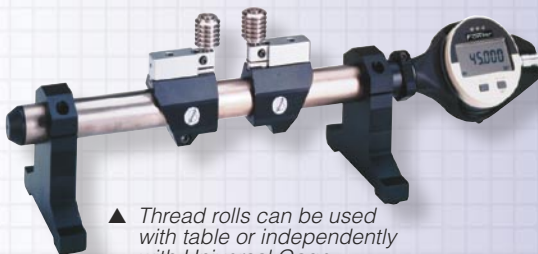

▲ Thread rolls can be used with table or independently with Universal Gage.

Order No.	Description
54-265-500	Universal Bench Gage Set. Includes accessories listed below:
<b>Accessories</b>	
54-265-023	Bench stand (feet)
54-265-024	Table and pair of mountings
54-265-025	Pair of small diameter measuring anvils
54-265-026	Pair of contact mounting arms
54-265-027	Alignment bar—sets standard contact mounting arms
54-265-028	Squareness setting gage
54-265-055	Pair of clamping adaptors
54-265-015	Pair of spherical Tip Contact Points
54-265-048	Pair of Internal Disc Anvils (large)
54-265-090	6" (150mm) extension
54-265-100	20" (500mm) extension
54-265-029	Carrier assembly for 2nd table (Included in 54-265-200)